



## 2MP Fixed-focal Wi-Fi Bullet Network Camera

# DH-F2C-PV



### Series Overview

The Bullet Series, which is under the Dahua Wireless series, are cameras that are not only easy to install and operate, but also perform outstandingly and are cost-effective. They capture sharp, detailed images of scenes in high definition and offer powerful functions, such as AI human detection, to accurately trigger alarms. Information is also synchronously sent to your phone to keep you up-to-date. With its IP67 rating, these cameras are able to withstand harsh environments, making them highly suitable for use in small and medium-sized settings such as small-sized retail stores.



#### 2MP

Clear images with sharp details



#### AI Human Detection

Focuses on what matters and reduces false alarms



#### Smart Dual Light

Captures color details for post-event review



#### Sound and Light Alarm

Provides instant alarms to deter intruders



#### Two-way Talk

Communication anytime, anywhere



#### IP67 Protection

Withstands harsh environments



#### H.265

Advanced H.265 compression technology




#### DMSS App

Easy to use



#### Micro SD Card

Low-cost storage

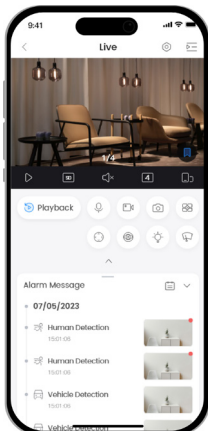

## Upgrade Your Experience with DMSS

Dahua Mobile Security Surveillance (DMSS) is a professional remote surveillance management platform that offers remote monitoring, device migration, and sharing. When connected to the internet, the platform provides real-time alerts to improve surveillance efficiency and grant flexibility in security management.





# Specifications

## Camera

Image Sensor	1/3" CMOS
Max. Resolution	1920 (H) × 1080 (V)
Electronic Shutter Speed	Auto/Manual 1/3 s–1/100,000 s
Illumination Distance	Up to 30 m (98.53 ft)
Illuminator On/Off Control	Auto
Illuminator Number	2 (IR LED); 2 (Warm light)
Max. Aperture	F1.6
Field of View	2.8 mm: H: 98°; V: 55°; D: 115° 3.6 mm: H: 78°; V: 41°; D: 94°

## Intelligence

Human Detection	Support the classification and accurate detection of human
-----------------	--

## Video & Audio

Video Compression	H.264B; H.264; H.264H; H.265
Video Frame Rate	Main stream: 1920 × 1080@(1–25/30 fps) Sub stream: 640 × 480@(1–25/30 fps) *The values above are the max. frame rates of each stream; for multiple streams, the values will be subjected to the total encoding capacity.
Resolution	1080p (1920 × 1080); 1280 × 960 (1280 × 960); 1280 × 720 (1280 × 720)
Video Bit Rate	H.264: 24 kbps–4096 kbps H.265: 9 kbps–4096 kbps
WDR	DWDR
Motion Detection	OFF/ON
Smart Illumination	Yes

Image Rotation	0°/180°
Built-in MIC	Yes, built-in speaker
Built-in Speaker	Yes, built-in Mic
Audio Compression	G.711a; G.711Mu; PCM; G.726

## Network

Network Port	RJ-45 (10/100 Base-T)
Wi-Fi	IEEE802.11b/g/n 2.4–2.4835 GHz; 2.4 G
Storage	Micro SD card (support max. 256 GB)
Management Software	Smart PSS; DSS; DMSS
Mobile Client	iOS; Android

## General

Certifications	CE-LVD: EN62368-1; CE-EMC: Electromagnetic Compatibility Directive 2014/30/EU; CE-RED: Radio Equipment Directive 2014/53/EU
Power Supply	12 VDC
Power Consumption	Basic: 2 W (12 VDC) Max. (H.265+warm light intensity): 6.5 W (12 VDC)
Operating Temperature	–40 °C to +60 °C (–40 °F to +140 °F)
Operating Humidity	≤95%
Protection	IP67
Casing Material	Metal + plastic
Product Dimensions	131.0 mm × 78.4 mm × 97.2 mm (5.47" × 4.80" × 3.83") (L × W × H)
Net Weight	266.5 g (0.59 lb)

# What's in the box



- |                             |                                    |                 |
|-----------------------------|------------------------------------|-----------------|
| <b>Tools:</b>               | <b>Documents:</b>                  | <b>Power:</b>   |
| Installation Position Map×1 | QR Code×1                          | Power Adapter×1 |
| Mounting Platex1            | Quick Start Guidex1                |                 |
| Screw Packagex1             | Legal and Regulation Information×1 |                 |
| Waterproof Connector x 1    |                                    |                 |

